

## mAP lite

The mAP lite is our smallest wireless access point. It is barely larger than a matchbox, we even had to use a special Ethernet port to match it's slim profile.



You can carry it anywhere: use as a travel router to extend that hotel internet to all your devices, or as a client device to improve your laptop signal range, the tiny mAP lite will be always with you.

It comes with a built-in magnet, so you can attach it to any ferrous surface, or, if those are not available, a metallic plate with an adhesive back is also included.



It can also serve as a simple configuration tool for your servers, if there is no ethernet on your mobile device, plus, it neatly attaches to the rack with it's magnet.

The mAP lite is a dual chain 802.11 b/g/n device and operates in 2GHz.




# Specifications

Product code	RBmAPL-2nD
CPU	QCA9533
CPU nominal frequency	650 MHz
CPU core count	1
Size of RAM	64 MB
10/100 Ethernet ports	1
Wireless	2.4 GHz 802.11b/g/n, dual-chain
PoE in	Passive and 802.3af/at
Supported input voltage	5 - 60 V
Dimensions	48x49x11mm
License level	4
Operating System	RouterOS
Max Power consumption	3.5 W

# Wireless specifications

Rate (2.4 GHz)	Tx	Rx
1MBit/s	22	-96
11MBit/s	22	-89
6MBit/s	20	-93
54MBit/s	18	-74
MCS0	20	-93
MCS7	16	-71

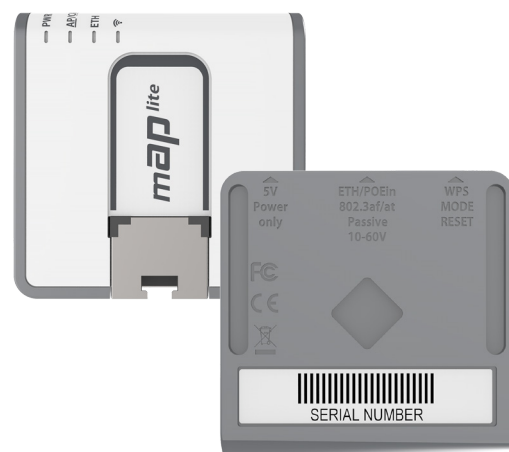

# Included



5V 1A Power adapter



K-44 mount kit